



# Fits anywhere

## Philips IntelliVue MP2 patient monitor

Small enough to carry and big enough to carry you anywhere, the Philips IntelliVue MP2 is an amazingly light, flexible, and durable transport monitor that's also amazingly easy to use. It's affordable, small in size, and big in capability. And best of all, it's from Philips, so you have the world-class quality, latest in design, and clarity of technology to make it easier for you to focus on the patient, not the monitor.

### Key advantages

- Amazingly light, flexible, and durable transport monitor that's also amazingly easy to use
- World-class quality, design, and technology to keep the focus on patients
- So compact, it's easily carried by patients, allowing them the freedom to roam while you care for them

**PHILIPS**  
sense and simplicity

# Small only in size

## A clearer view

The IntelliVue MP2 features a flexible display design which is configurable to your environment and can display up to 3 waveforms.

We've redesigned the user interface to improve visibility of patient data, make it easier to use, and to enhance compatibility with standard software.

## Industry-leading measurements and workflow

The monitor features a crisp and colorful touch screen with 3.5" display, as well as seamless electronic recording of ECG, SpO<sub>2</sub>, and NBP. The wireless telemetry parameter expands capabilities to provide untethered in-room access to telemetry data in near-real time. The system also has a removable 3-hour battery.<sup>1</sup>


Capture, review, and store diagnostic 12-lead ECGs at the monitor before sending them to the IntelliVue Information Center. You can also locally print in a harmonized layout. Each NBP measurement now generates a column in the vital signs trend table.

Measurements for other values are added to provide a comprehensive vital signs data set for the NBP measurement time, offering a more complete picture.

The Smart Alarm Delay algorithm helps reduce the number of pulse oximetry nuisance alarms, allowing you to focus your attention where needed.<sup>2</sup>

## Connecting to more

Connect to an IntelliVue XDS Large Display to transform the compact IntelliVue MP2 into a versatile standalone monitor, with the same outstanding screen flexibility available in high-acuity IntelliVue monitors. XDS remote-control functionality gives you the flexibility to access and control the IntelliVue MP2 wherever and however you choose to optimize your workspace ergonomics.

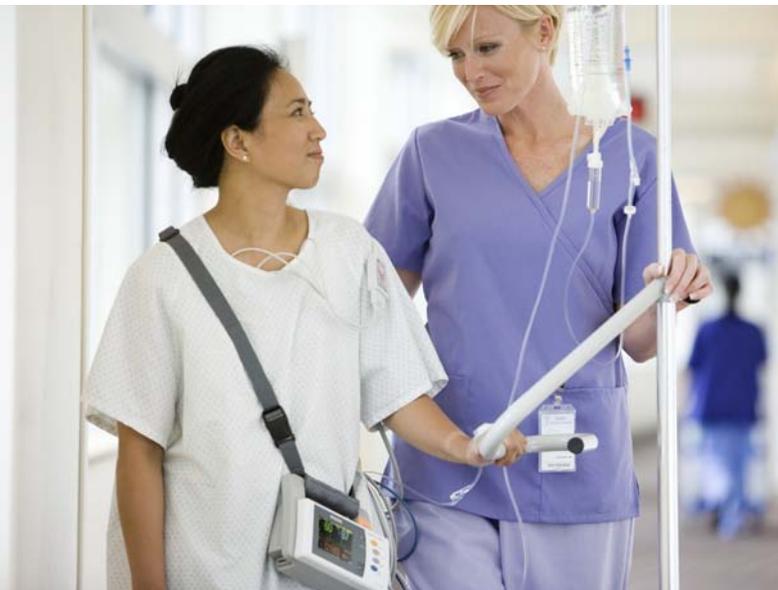

IntelliVue MP2 is so compact, it's easily carried by patients in low-acuity settings.



Now getting from Point A to point B is as easy as 1, 2,3 with a fast and simple way to monitor a patient during transport.

# Clearer decisions in tough situations

**Seamless wired and wireless performance** with easy switching between modes.

**Comfortable handle** for easy transport.

**Lightweight.** The basic monitor weighs just 1.5 kg (3.3 lbs.) and is small enough to take anywhere.

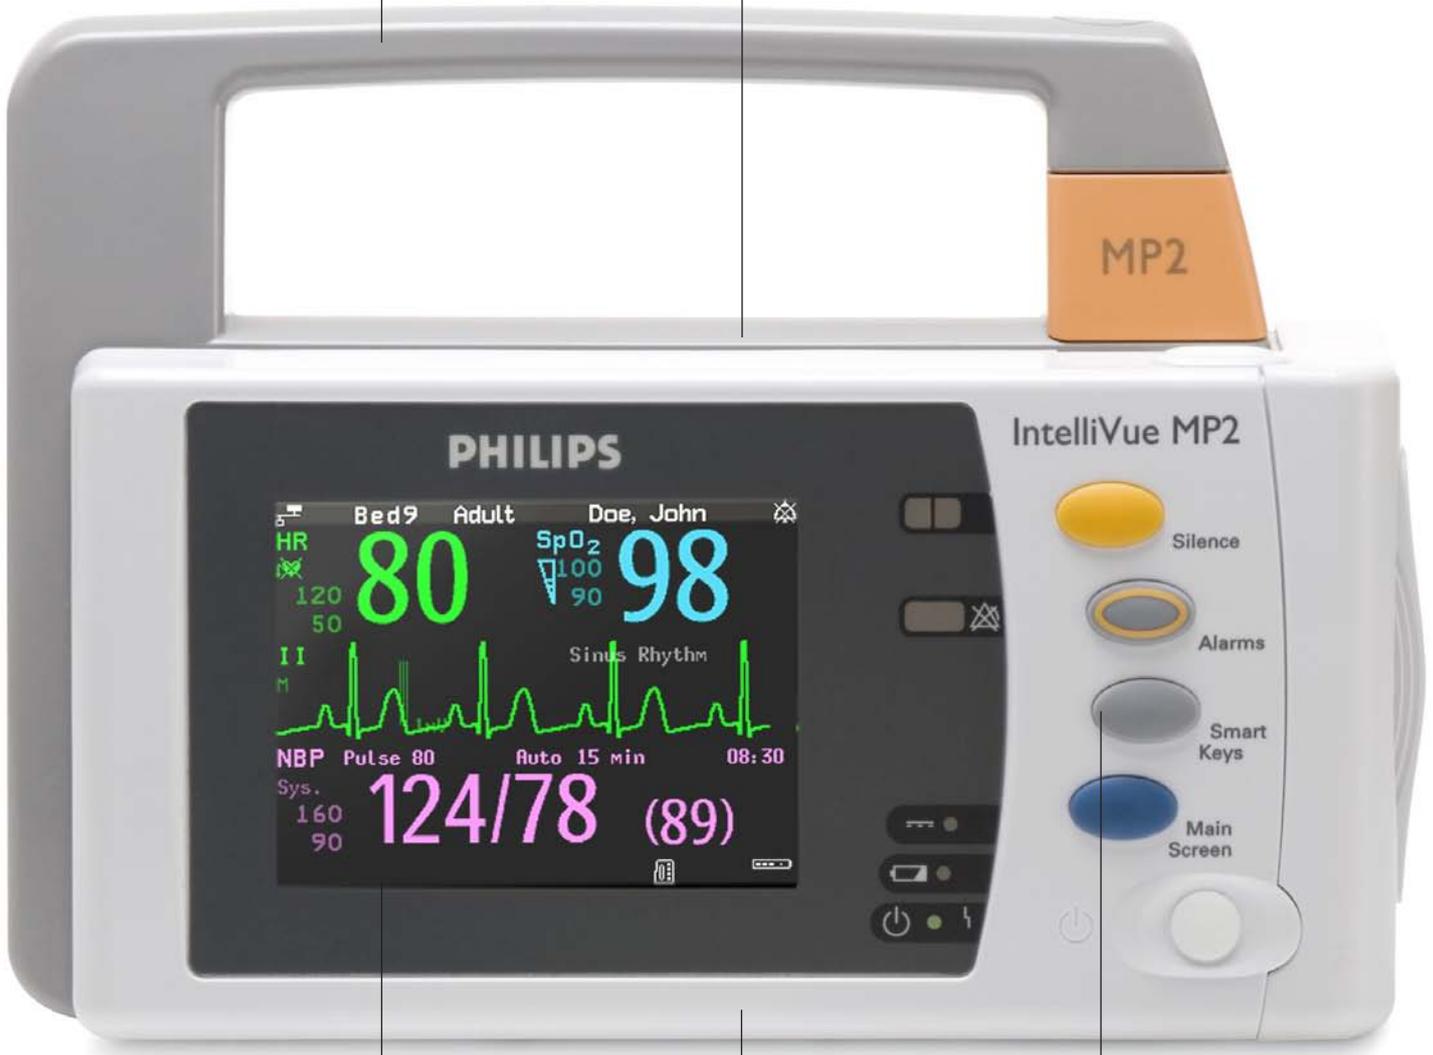


Photo near actual size

**Outdoor profile** so the monitor can be used in bright sunlight and areas with higher ambient noise.

**Crisp and colorful touchscreen display** designed for easy information input and intuitive onscreen navigation.

**Sturdy housing** (Class 7M3) to withstand rough handling.

**Long battery run time** of up to 3 hours.<sup>1</sup>

**Configurable Smart Keys**

# IntelliVue MP2 easily monitors anywhere, anytime



The basic monitor weighs just 1.5 kg (3.3 lbs).



Features an intuitive touchscreen with configurable SmartKeys.



IntelliVue MP2 with IntelliVue XDS Large Display.



The Philips X2/MP2 Battery Extension<sup>3</sup> provides additional battery run time of up to six<sup>4</sup> hours for intra-hospital patient transport and concurrent CO<sub>2</sub> measurement with additional invasive blood pressure and temperature measurement.

1. The 3-hour battery life is based on these conditions: basic alarming, one new and fully charged battery, automatic brightness reduction, ECG/Resp and SpO<sub>2</sub> in use, NBP every 15 minutes.

2. Not available in the U.S.

3. Available December 2010

4. The 6-hour battery life is based on these conditions: one new and fully charged battery, on MP2/X2 basic alarming, automatic brightness reduction, ECG/Resp and SpO<sub>2</sub> in use, NBP every 15 minutes and connected Multi-Measurement Server Extension



Philips offers a wide range of supplies, including cuffs, SpO<sub>2</sub> sensors, and a variety of cables and leads to optimize performance of your Philips equipment.

M8102A MP2

[asimpleswitch.com](http://asimpleswitch.com)

Please visit [www.philips.com/IntelliVueMP2](http://www.philips.com/IntelliVueMP2)



© 2010 Koninklijke Philips Electronics N.V.  
All rights are reserved.

Philips Healthcare reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.

Philips Healthcare is part of Royal Philips Electronics

[www.philips.com/healthcare](http://www.philips.com/healthcare)  
[healthcare@philips.com](mailto:healthcare@philips.com)

Printed in The Netherlands  
4522 962 63921 \*AUG 2010